


- NOTES:
- MATERIAL:
    - HOUSING: THERMOPLASTIC, UL 94V-0, COLOR: BLACK
    - CONTACT: COPPER ALLOY T=0.10mm
    - MAIL: STAINLESS STEEL, T=0.20mm
  - FINISH:
    - CONTACT: GOLD PLATING ON CONTACT AREA (SEE P/N)
    - TIN 100u" MIN PLATING ON SOLDER TAILS
    - 50u" MIN NICKEL UNDERPLATING OVER ALL
  - PRODUCT SPECIFICATIONS:
    - VOLTAGE RATING: 250V
    - CURRENT RATING: 2.0A
    - INSULATION RESISTANCE: 1000MEG OHM MIN
    - CONTACT RESISTANCE: 50 MILLI OHM MAX
    - OPERATION TEMPERATURE: -55° TO +125°
    - DURABILITY: 3000 CYCLES
    - NORMAL FORCE: 80gf MIN AT THE WORKING POSITION

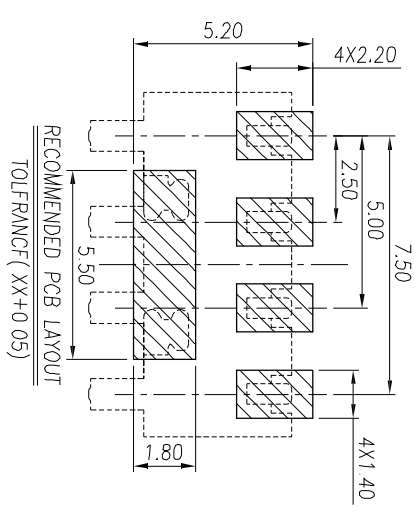

UNITS: mm		<b>CSCONN</b>		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE:	
X. ° ±5°	0. X ±0.3	CBA25043502001		BATTERY 4P 2.5MM H=3.5MM	
X. 1 ±2°	0. XX ±0.2	APPD:		DWG NO.	
XX. ±1°	0. XXX ±0.1	CHKD: Sk11a		BATTERY	
XXX. ±0.5°		DR: Kitty		SCALE SHEET REV	
				1:1 1 OF 1 A	