


- SPECIFICATIONS**
- CURRENT RATING: 1.0A
 - VOLTAGE RATING: 240VAC
 - OPERATING TEMPERATURE RANGE: -55°C TO +125°C
 - OPERATING HUMIDITY RANGE: 90% TO 95%
 - WITHSTANDING VOLTAGE: 700V AC/MINUTE.
 - PART NUmBER DESCRIPTION:
CBT-12704XXF-XX

HEIGHT
50=5.05MM HEIGHT
ND, DF ROWS

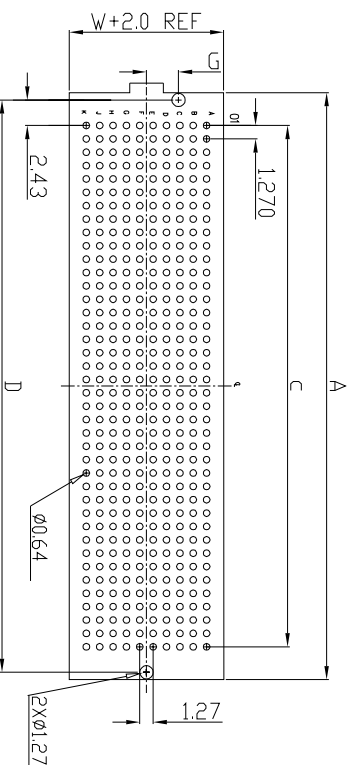

Recommended PC board pattern
(TOP VIEW)

ROWS	W	G
4	5.66	2.01
5 OR 6	8.20	3.05
8	10.74	3.05
10	13.28	3.05
12	15.82	3.05
14	18.36	3.05

HEIGHT	H
1	5.05
2	6.05
3	6.55
4	7.54

	5.05	6.05	6.55	7.54
4.72	7.00	8.00	8.50	9.50
5.72	8.00	9.00	9.50	10.50
6.22	8.50	9.50	10.00	11.00
8.23	NA	NA	12.00	NA
9.27	11.50	12.50	13.00	14.00
9.70	12.00	13.00	13.50	14.50
11.71	14.00	15.00	15.50	16.50
13.72	16.00	17.00	17.50	18.50

POSITION	COPPLANARITY
10 PIN	0.15
30 PIN	0.20
40 PIN	0.23
50 PIN	0.23

NO. OF ROWS	A	B	C	D
10	18.52	17.02	11.43	16.28
15	24.87	23.37	17.78	22.63
19	29.95	28.45	22.86	27.71
20	31.22	29.72	24.13	28.98
25	37.57	36.07	30.13	35.33
30	43.92	42.42	36.83	41.68
40	56.62	55.12	49.53	54.38
50	69.32	67.82	62.23	67.08

UNITS: mm

GENERAL TOLERANCE

X. ±.5°

X. ±.2°

X. ±.1°

CSCONN

PART NO. (INTENDED USE)
CBT-12704XXF-XX

APPD:

CHKD: Skila

DR: Kitty

CSCONN PRECISE ELECTRONICS CO.,LTD

TITLE: BTB 1.27MM XP FEMALE H=XXMM

DWG NO. BTB



SCALE SHEET REV

1:1 1 OF 1 A