



4.5 ± 0.15

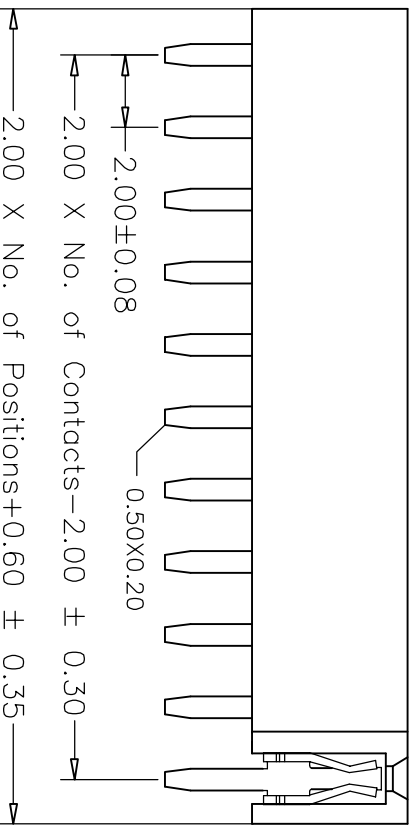

2.4 ± 0.30




2.0 ± 0.15

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

PCB LAYOUT

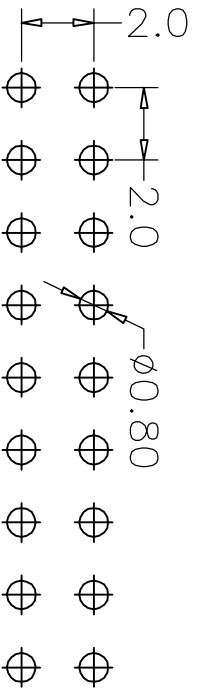

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE:	
X. ° ±5°	0.3 ± 0.25	CFH200243XX001		FH 2.0MM XP DIP180双排塑高4.3MM	
X.1 ± 2°	0.3X ± 0.2	APPD:		DWG NO. FH	
XX. ± 1°	0.3XX ± 0.1	CHKD: Skila		SCALE	
		DR: Kitty		1:1	
				SHEET	
				1 OF 1	
				REV	
				A	