
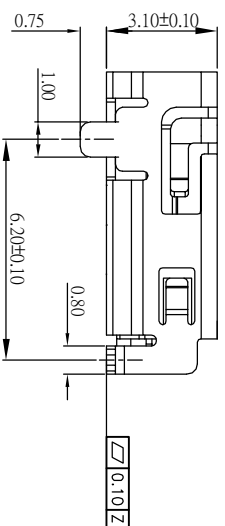


RECOMMENDED P.C.B. LAYOUT
TOLERANCE: ±0.05 TOP VIEW

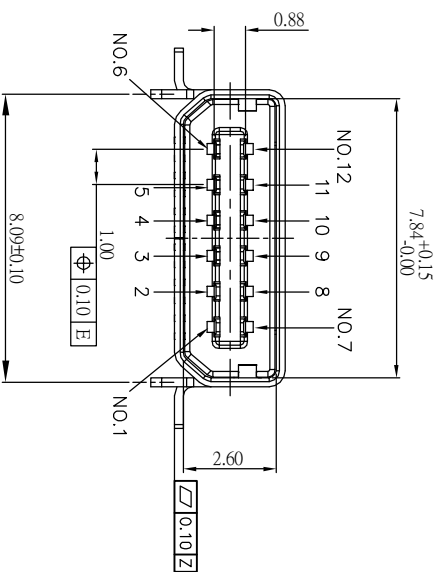

4	Shell	Copper Alloy		1200 ^u m
3	Contact B	Copper Alloy		Au:30 ^u m
2	Contact A	Copper Alloy		Au:30 ^u m
1	Housing	High Temperature Thermoplastic	Black	UI94V-0
NO	DESCRIPTION	MATERIAL	COLOR	REMARK

CSCONN

CSCONN PRECISE ELECTRONICS CO.,LTD

UNITS:	mm
GENERAL TOLERANCE	
X. ° ±5°	0. X ±0.25
X. 1 ±2°	0. XX ±0.2
XX. ±1°	0. XXX ±0.1

PART NO. (INTENDED USE)
CMU-051231-T

TITLE: MINI USB 12P FEMALE SMT

APPD:

DWG NO. MINI USB

CHKD: SK11a

SCALE SHEET

DR: Kitty

1 OF 1



REV A