



- Specification:
1. Current Rating: 10 AMP
  2. Voltage Rating: 30V AC,DC
  3. Dielectric Strength: 500V AC RMS for 1 minute.
  4. Contact Resistance: 30 mΩ Max.
  5. Insulator Resistance: 500M Ω Min. AT 250V DC.
  6. Mating/Umating cycles: 2000 cycles
  7. Temperature: -20°C to +60°C



ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	C2680R-H Au/Ni Plating $T=0.30\text{mm}$	
2	Contact	5	Phosphor bronze CS270R-EH Au/Ni Plating $T=0.20\text{mm}$	
1	Housing	1	PA9T&LCP (G.F30%) Black	

UNITS: mm		<b>CSCCONN</b>		CSCCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO. (INTENDED USE)		TITLE:	
X. ° ±5°	0. X±0.25	CMU0654318003		MICRO USB 5P DIP 防水沉板式	
X. 1±2°	0. XX±0.2	APPD:		DWG NO. MICRO USB	
XX. ±1°	0. XXX±0.1	CHKD: Skilla		SCALE SHEET REV	
		DR: Kitty		1:1 1 OF 1 A	

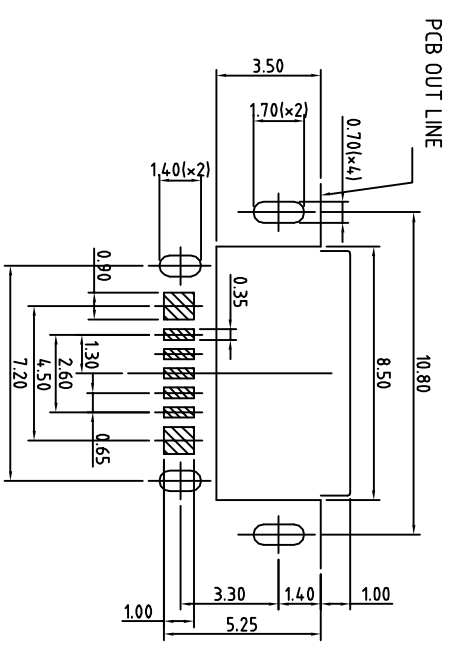