



RECOMMENDED P.C.B LAYOUT

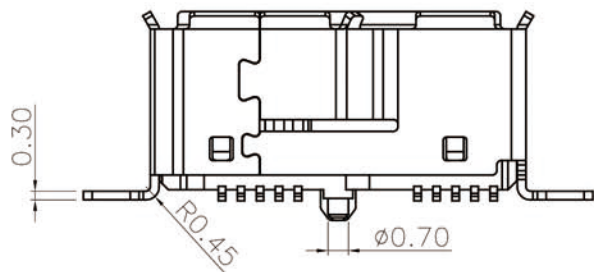

Notes:

1) Material:

Insulator : Thermoplastic G.F. UL94V-0
 Contacts : Copper Alloy
 Shell : Metal


2) Environmental :

-55° C to +105° C

3) Finish

Shell : 50u"min. Solderable Ni
 Contacts : 1~30u" min. Gold on mating area.
 100u" min. Tin on the tails.

NO.	TITLE	Q'TY	MATERIAL	REMARK
4	CAP	1	LCP	UL94V-0; COLOR:BLACK
3	SHELL	1	SUS304	50u"min. Solderable Ni
2	TERMINAL	10	C2680-H	SEE NOTE
1	Molding-ASSY	1	LCP	UL94V-0; COLOR:BLACK

UNITS: mm		CSCONN	CSCONN PRECISE ELECTRONICS CO.,LTD		
GENERAL TOLERANCE					
X. ° ±5°	0.X ±0.3	PART NO.(INTENDED USE) CMU30106504004		TITLE: MICRO USB 3.0 FEMALE 立贴	
X. 1 ±2°	0.XX ±0.2	APPD:		DWG NO. USB	
XX. ±1°	0.XXX ±0.1	CHKD: Skila			
XXX. ±0.5°		DR: Kitty			
				REV A	