



3.5Ø 4POLE PLUG (TOLERANCE: ±0.05)

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 0.5A;
 - CONTACT RESISTANCE: 30mΩ MAX (INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.3~3.0 KGf
 - WITHDRAWAL FORCE : 0.3~3.0 KGf
 - LIFE TEST: 5,000 CYCLES MIN.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - *REPRESENT CRITICAL DIMENSIONS.
 - CPK CONTROLLED DIMENSIONS.



RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

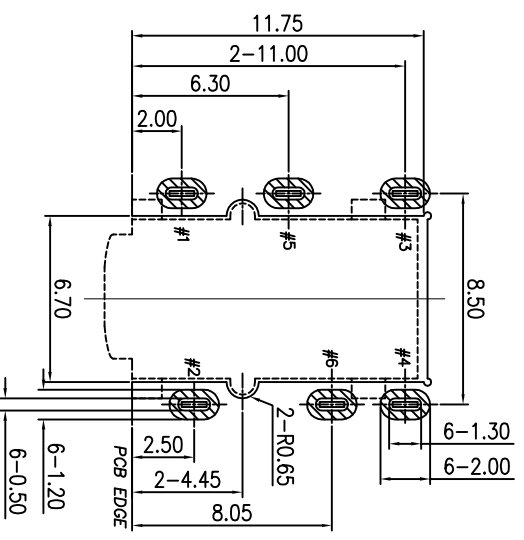

7	BODY	1	HIGH TEMP. THERMOPLASTIC	BLACK COLOR
6	TERMINAL 6	1	PHOSPHOR BRONZE 0.2t	Au1U ³ Mn
5	TERMINAL 5	1	PHOSPHOR BRONZE 0.2t	Au1U ³ Mn
4	TERMINAL 4	1	PHOSPHOR BRONZE 0.2t	Au1U ³ Mn
3	TERMINAL 3	1	PHOSPHOR BRONZE 0.2t	Au1U ³ Mn
2	TERMINAL 2	1	PHOSPHOR BRONZE 0.2t	Au1U ³ Mn
1	TERMINAL 1	1	PHOSPHOR BRONZE 0.2t	Au1U ³ Mn
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

CSCONN

CSCONN PRECISE ELECTRONICS CO.,LTD

UNITS: mm		PART NO. (INTENDED USE)		TITLE:	
GENERAL TOLERANCE		CPJ3579		PHONE JACK	
X. ° ±5°	0. X ±0.25	APPD:	DWG NO. JACK		
X. 1 ±2°	0. XX ±0.2	CHKD:	SCALE SHEET		
XX. ±1°	0. XXX ±0.1	DR:	1:1 1 OF 1 REV		
		Kitty	A		