

C1:VCC  
C2:RST  
C3:CLK  
C5:GND  
C6:VPP  
C7:I/O

NANO SIM CARD

NOTES:

1) MATERIAL:


- 1-1 HOUSING:THERMOPLASTIC,UL 94V-0,COLOR:BLACK
- 1-2 CONTACT:COOPER ALLOY
- 1-3 SHELL:STAINLESS STEEL

2) FINISH:

- 2-1 CONTACT:GOLD PLATING ON CONTACT AREA(SEE P/N DESCRIPTION)
- 1 $\mu$  MIN AU PLATING ON SOLDER AREA,
- 50 $\mu$  MIN NICKEL UNDERPLATING OVER ALL
- 2-2 SHELL:1 $\mu$  MIN AU PLATING ON SOLDER AREA
- 50 $\mu$  MIN NICKEL UNDERPLATING OVER ALL

3) PRODUCT SPECIFICATIONS:

- 3-1 VOLTAGE RATING: 50V
- 3-2 CURRENT RATING: 1.0A
- 3-3 INSULATION RESISTANCE: 100MEG.OHM MIN
- 3-4 CONTACT RESISTANCE: 50 MILL.OHM MAX
- 3-5 OPERATION TEMPERATURE: -20° TO +85°
- 3-6 DURABILITY: 3000 CYCLES

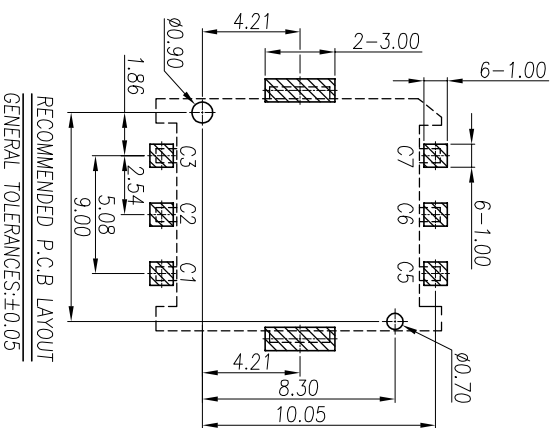

RECOMMENDED P.C.B LAYOUT  
GENERAL TOLERANCES:±0.05

UNITS: mm	<b>CSCONN</b>		TITLE: CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE	PART NO.(INTENDED USE)	DWG NO. SIM CARD		
X. ±5° 0.X±0.25	CS106101503003	SCALE	SHEET	REV
X.1±2° 0.XX±0.2	APPD:	1:1	1 OF 1	A
XX.±1° 0.XXX±0.1	CHKD: Skilla			
	DR: Kitty			