
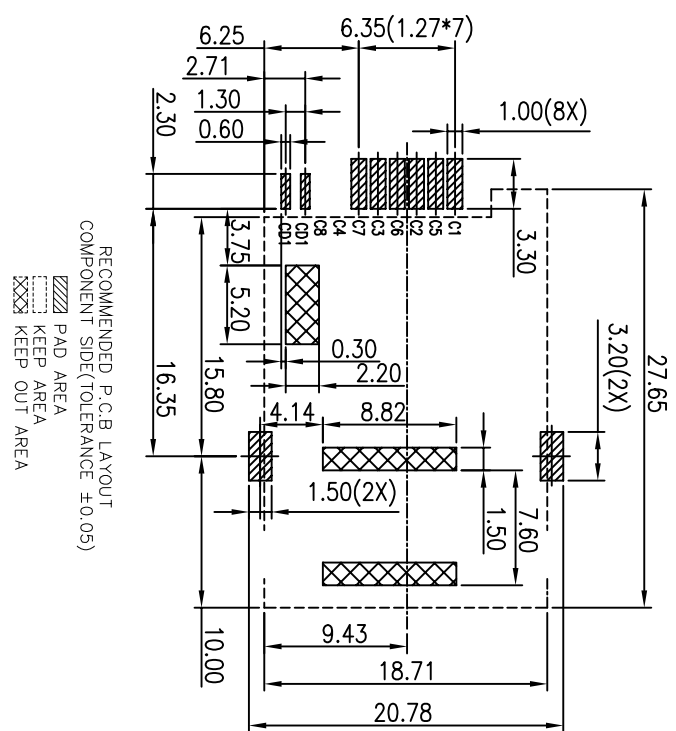
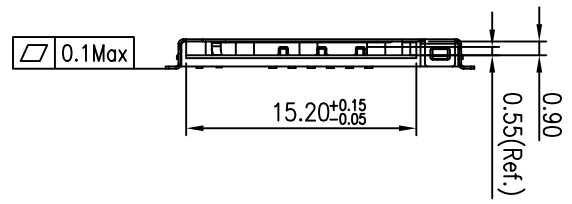


SECTION A-A
7.62(Ref.)

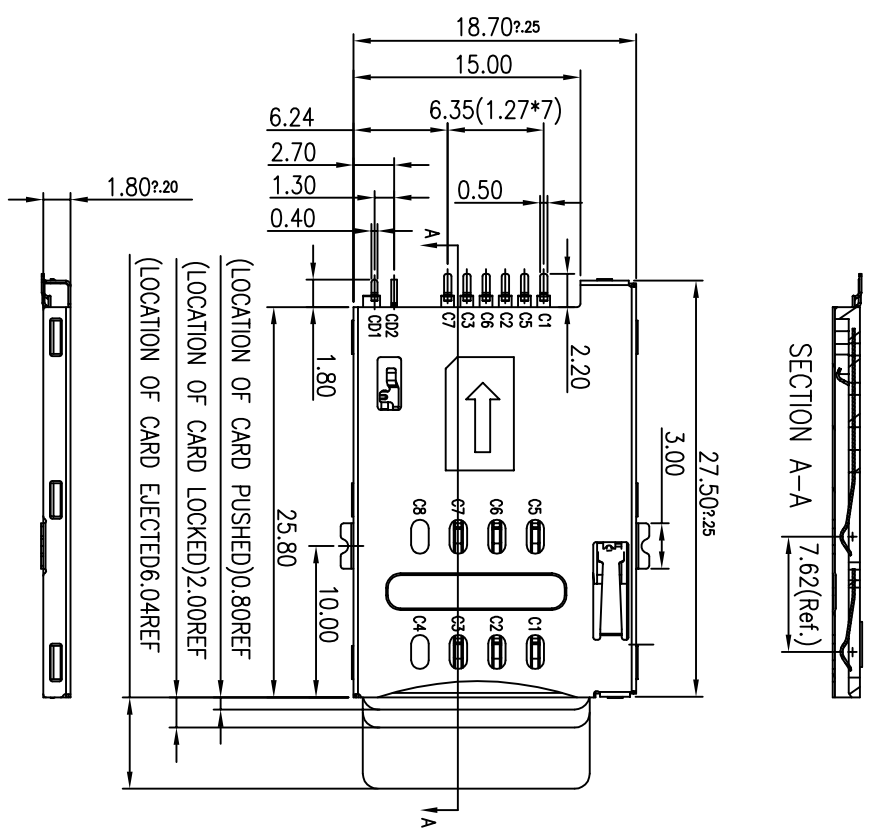


RECOMMENDED P.C.B. LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)
▨ PAD AREA
▨ KEEP AREA
▨ KEEP OUT AREA

NOTES:
Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
CD PIN: Copper Alloy
Shell: STAINLESS

MATERIAL:
Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
CD PIN: Copper Alloy
Shell: STAINLESS

Electrical:
Current Rating: 0.5mA AC/DC max.
Voltage Rating: 10V AC/DC
Ambient Temperature Range: -40°C~+85°C
Storage Temperature Range: -40°C~+85°C
Ambient Humidity Range: 95% R.H. Max.
Contact Resistance: 100mΩ max.
Insulation Resistance: 1000MΩ min./500VDC
Mating Cycles: 5,000 Insertions
Temperature: 260°C ±5°

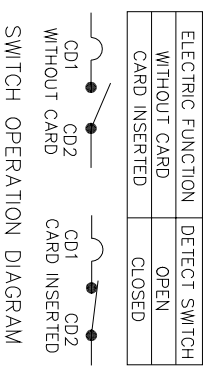

ITEM	PART NAME	QTY	MATERIAL	FINISH
1	HOUSING	1	Hi-temp Thermoplastic	Black UL94V-0
2	SHELL	1	Stainless Steel	SMT area: gold plated
3	DATA CONTACT	1	Copper Alloy	Contact area: gold plated
4	HEART CAM	1	Hi-temp Thermoplastic	Black UL94V-0
5	COIL SPRING	1	SMP.	
6	CAM PIN	1	Stainless Steel	
7	CD2 SWITCH	1	Copper Alloy	Contact area: Gold plated

UNITS: mm
GENERAL TOLERANCE: ±.15
CSCONN
CS106127185004
TITLE: SIM CARD SOCKET 6+2P PUSH WITH SWITCH
CSCONN PRECISE ELECTRONICS CO.,LTD

APPD: CS106127185004
CHKD: SKI:la
DR: Kitty
DWG NO. SIM CARD

SCALE: 1:1
SHEET: 1 OF 1
REV: A