

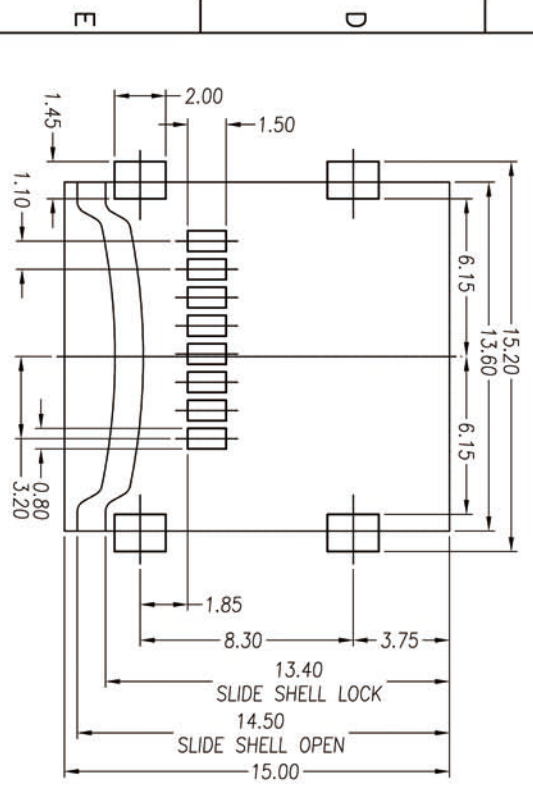


SLIDE SHELL OPEN SLIDE SHELL LOCK



RECOMMENDED PCB LAYOUT



P8	DATA1
P7	DATA0
P6	VSS
P5	CLK
P4	VDD
P3	CH0
P2	CD/DATA3
P1	DATA2
N NUMBER	PN NUMBER

- NOTES:
1. VOLTAGE RATING: 100V
  2. CURRENT RATING: 0.5A
  3. INSULATION RESISTANCE: 1000 MEG. OHM MAX
  4. CONTACT RESISTANCE: 100MILL. OHM MAX
  5. OPERATION TEMPERATURE: -20° TO +85°
  6. DURABILITY: 5000 CYCLES

UNITS:		<b>CSCONN</b>		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO. (INTENDED USE)		TITLE:	
X. ° ±5°	0. X ±0.25	CTP1108180001		T-FLASH CARD 掀盖式 H=1.8MM	
X. 1 ±2°	0. XX ±0.2	APPD:		DWG NO. T-FLASH CARD	
XX. ±1°	0. XXX ±0.1	CHKD: Skilla		SCALE 1:1	
		DR: Kitty		SHEET 1 OF 1	
				REV A	