


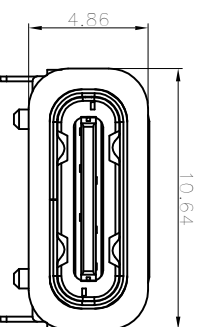
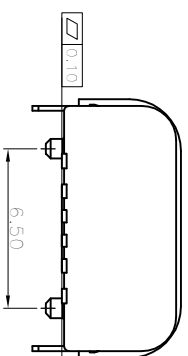



- NOTES:
- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 3000 CYCLES
 - WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.

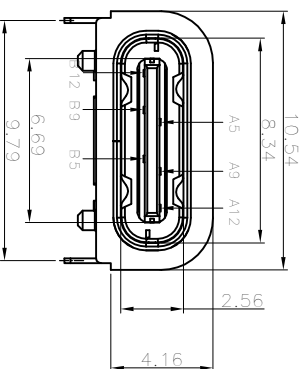

加防水圈示意图

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1POS
3	CONTACT	COPPER ALLOY	TIN/AU/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1POS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

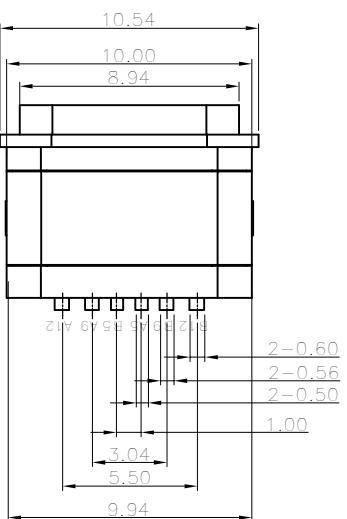

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

UNITS: mm	
GENERAL TOLERANCES	
X ± 0.1	0.1 ± 0.25
X ± 0.2	0.1 ± 0.2
X ± 0.1	0.1 ± 0.1

PART NO. (INTENDED USE)	CUS31067801005
TITLE:	USB TYPE C FEMALE 6P SMT防水

APPD:	SK11a
CHKD:	Kitty

DWG NO.	USB
SCALE	1:1
SHEET	1 OF 1
REV	A

CSCONN PRECISE ELECTRONICS CO.,LTD

USB

1:1

A